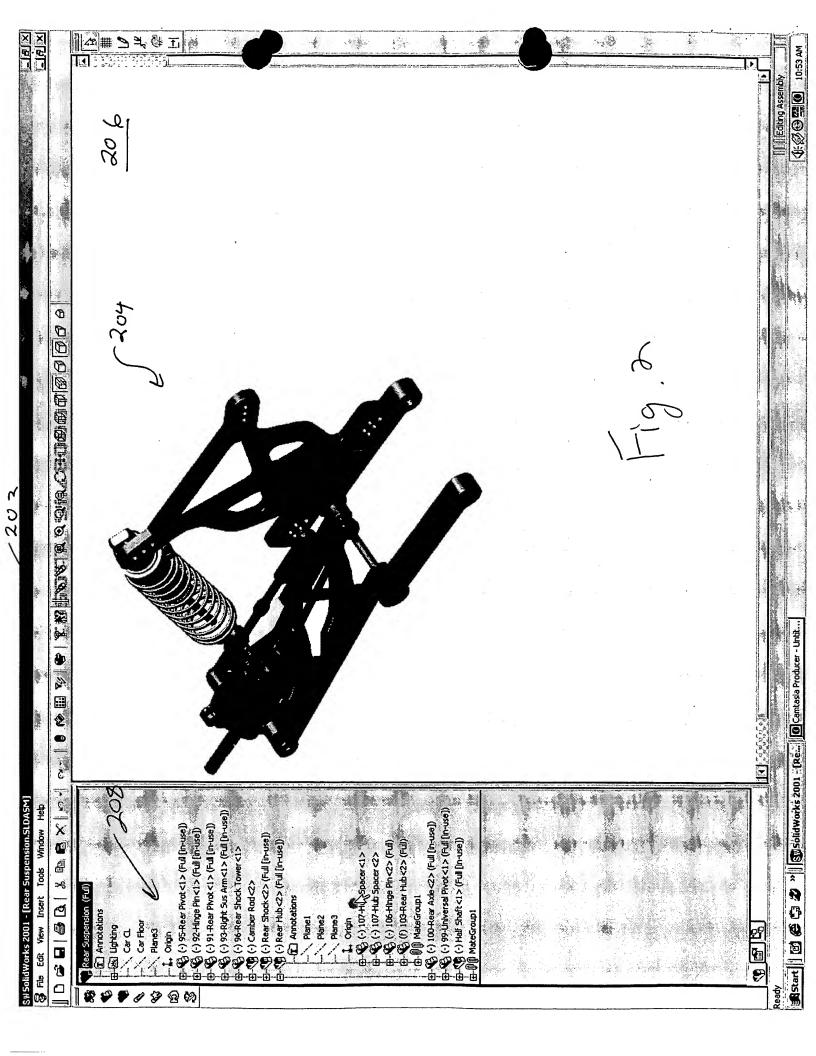
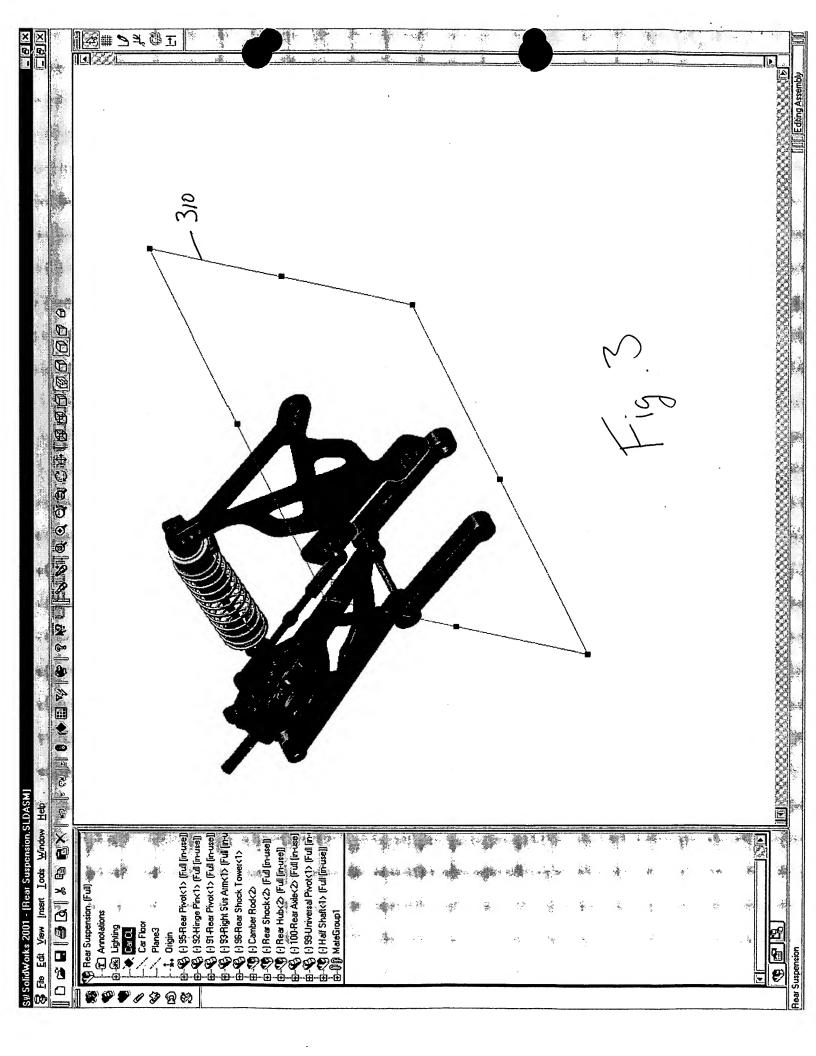
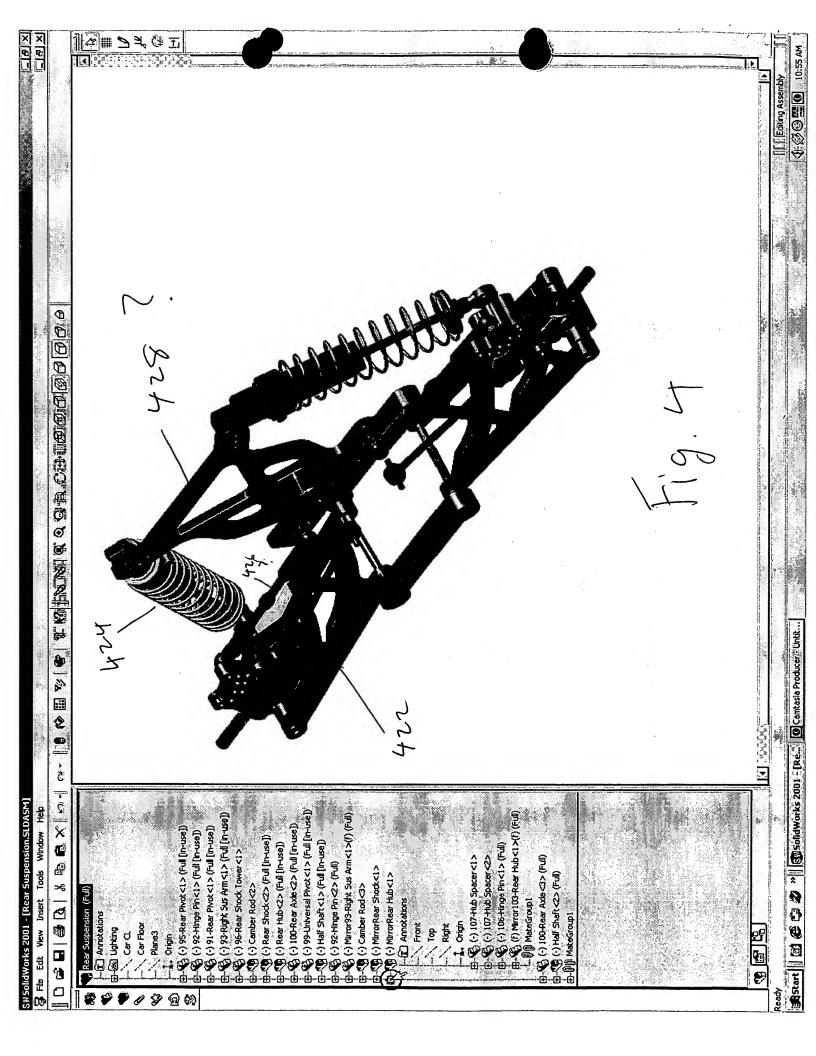


Fig. 1







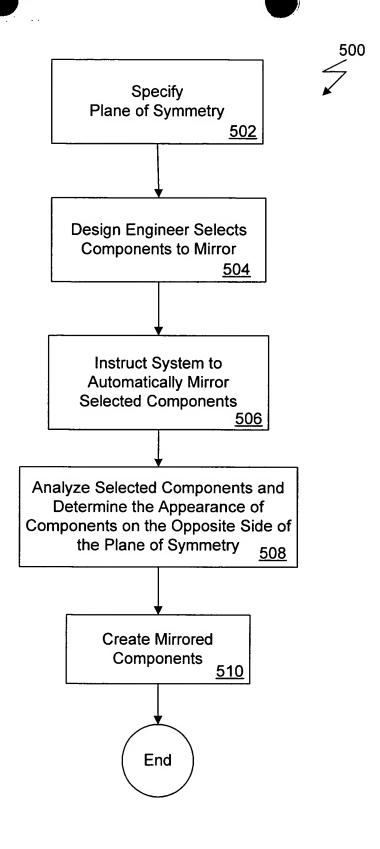




Fig. 5


Mirror Components	
	Mirror plane: Carcumental Carcuments
60) AF	
	# ☑ Rear Shock-2 # ☑ Rear Hub-2
	Z Stant Sus Annals
	2 92 Hinge Pin 1
	c
	TO MISHANDIS COMMENT OF THE PROPERTY OF THE PR
in port	
	: ☑ : ≋ This component has a "left-hand" and "right-hand" version:
	The same part is used on both sides of the assembly
	Recreate mates to new components
in co	Press Help for more information on these options
	Proceedings of the process of the whole of the control of the cont
100000 200000	
12 400 2 10 10 10 10 10 10 10 10 10 10 10 10 10	
Horas and	HACLE TO IN THE SECOND SECOND OF THE SECOND


Fig. 6


Fig. 7












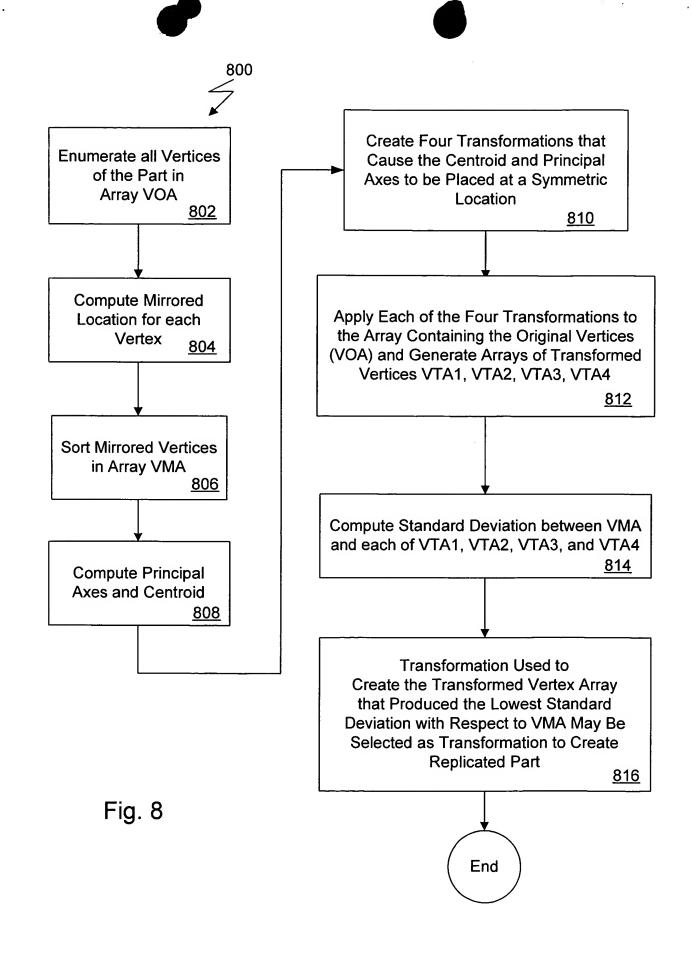

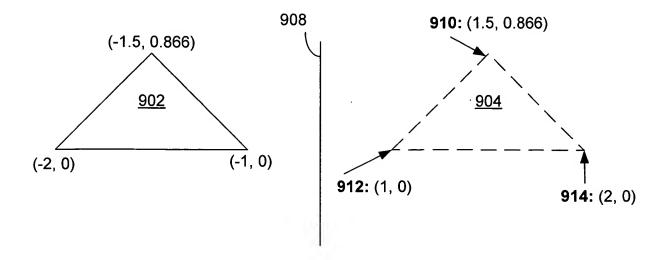
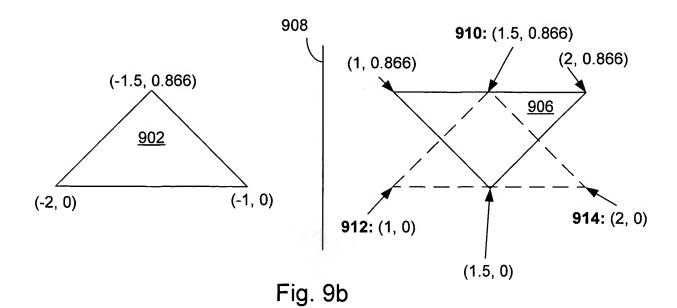


Fig. 9a



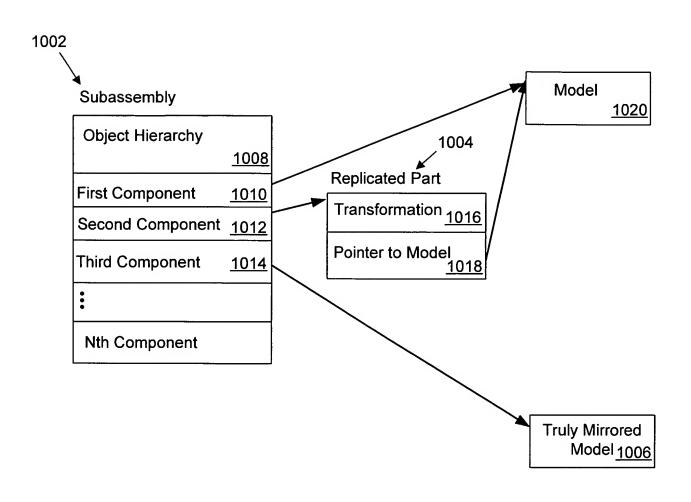


FIG. 10

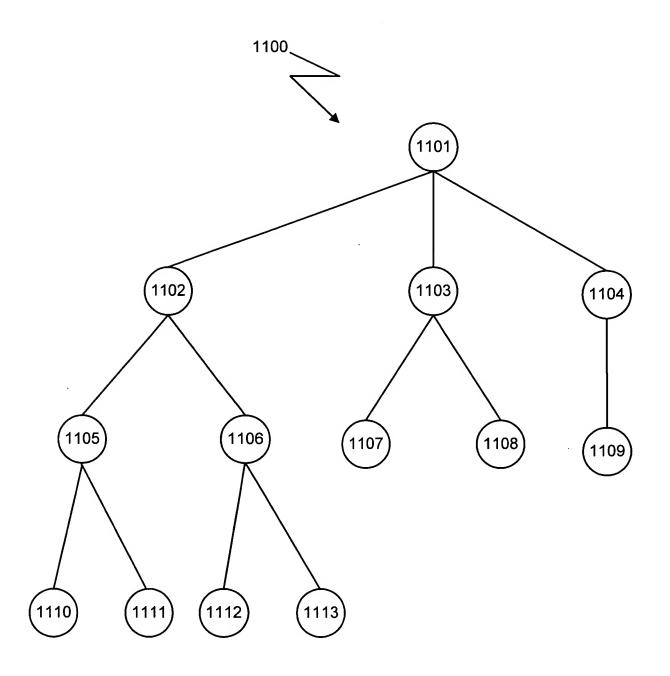


Fig. 11

